

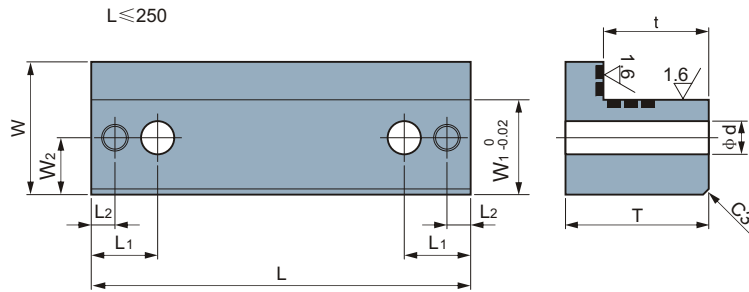


JVSOL Oilless Wear Plate


Material 650# + Graphite



L=250

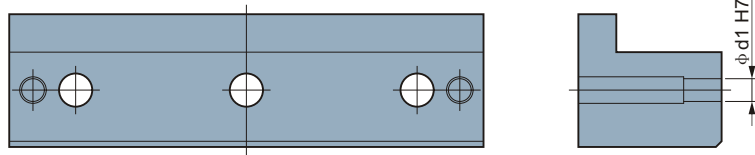

L=400

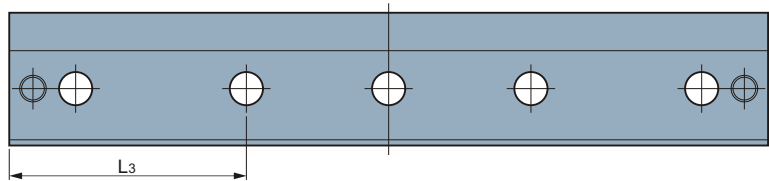

Sliding directions
↔

| Standard No. | W | L | W ₁ | W ₂ | L ₁ | L ₂ | L ₃ | T | t | d | d ₁ |
|----------------|----|-----|----------------|----------------|----------------|----------------|----------------|------|------|------|----------------|
| JVSOL-25 × 125 | 25 | 125 | 18 | 9 | 27.5 | 10 | - | 15.5 | 8.5 | 9 | 6 |
| JVSOL-25 × 160 | | 160 | | | | | | | | | |
| JVSOL-32 × 125 | 32 | 125 | 22 | 11 | 27.5 | 10 | - | 30.5 | 15.5 | 11 | 8 |
| JVSOL-32 × 160 | | 160 | | | | | | | | | |
| JVSOL-32 × 200 | 32 | 200 | 22 | 11 | 27.5 | 10 | - | 30.5 | 15.5 | 11 | 8 |
| JVSOL-55 × 100 | | 100 | | | | | | | | | |
| JVSOL-55 × 160 | 55 | 160 | 37 | 20 | 27.5 | 10 | - | 55.5 | 39.5 | 13.5 | 10 |
| JVSOL-70 × 160 | 70 | 160 | 50 | 30 | 35 | 12.5 | - | 75.5 | 55.5 | 17.5 | 12 |
| JVSOL-70 × 200 | | 200 | | | | | | | | | |
| JVSOL-70 × 250 | | 250 | | | | | | | | | |
| JVSOL-70 × 400 | | 400 | | | | | | | | | |
| JVSOL-85 × 160 | 85 | 160 | 63 | 38 | 42.5 | 15 | - | 90.5 | 65.5 | 22 | 16 |
| JVSOL-85 × 200 | | 200 | | | | | | | | | |
| JVSOL-85 × 250 | | 250 | | | | | | | | | |
| JVSOL-85 × 400 | | 400 | | | | | | | | | |