
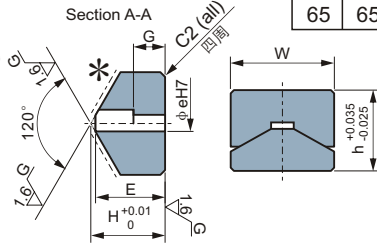

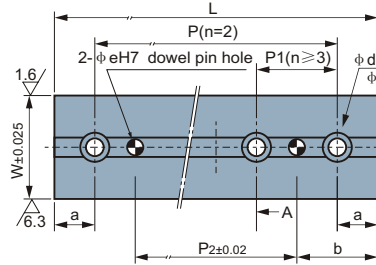
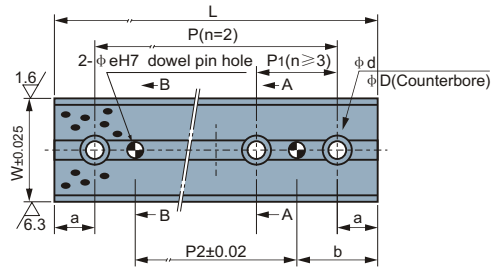



JCBS, JCBSP Oilless Cam Bottom Guide Plate 凸轮底部导板



JCBSP	S45C + Graphite
	钢基+石墨 HRC≥55
JCBS	650# + Graphite
	高力黄铜+石墨

W	h	d	D
35	35	9	14
50	50	11	17.5
65	65	11	17.5

* Induction area
热处理区域

Unit(单位): mm

Standard No. 型号规格	W	L	H	a	b	P	P ₁	No. of Bolt Holes 螺栓数量	e	P ₂	E	F	G	J	
JCBS-75×35	35	75	24	15	30	45	-	2	8	15	15	-	4	11	
JCBS-100×35		100		60	20	40				85					70
JCBS-125×35		125		85	25	50				100					50
JCBS-150×35		150		110	30	60				125					75
JCBS-75×50	50	75	31	15	30	45	-	2	10	15	18	15	8	13	
JCBS-100×50		100		60	20	40				75					50
JCBS-125×50		125		75	25	50				100					75
JCBS-150×50		150		100	30	60				125					100
JCBS-100×65	65	100	35	20	40	60	50	3	10	20	200	-	-	-	
JCBS-150×65		150		50	4	100									
JCBS-200×65		200		75	5	150									
JCBS-250×65		250		100	6	200									
JCBS-300×65		300		125	7	250									
				150	8	300									

Standard No. 型号规格	W	L	H	a	b	P	P ₁	No. of Bolt Holes 螺栓数量	e	P ₂	E	G	
JCBSP-75×35	35	75	20	15	30	45	-	2	8	15	17	4	
JCBSP-100×35		100		60	20	40				85			70
JCBSP-125×35		125		85	25	50				100			50
JCBSP-150×35		150		110	30	60				125			75
JCBSP-75×50	50	75	32	15	30	45	-	2	10	15	29	10	
JCBSP-100×50		100		60	20	40				75			50
JCBSP-125×50		125		75	25	50				100			75
JCBSP-150×50		150		100	30	60				125			100
JCBSP-100×65	65	100	47	20	40	60	50	3	10	20	44	20	
JCBSP-150×65		150		50	4	100							
JCBSP-200×65		200		75	5	150							
JCBSP-250×65		250		100	6	200							
JCBSP-300×65		300		125	7	250							
				150	8	300							